


NOTES:


1. ALL EARTH CABLES SHALL BE SIZED IN ACCORDANCE WITH SS 638.
2. THE OVERALL EARTHING SCHEMATIC ALONG WITH ROUTING IS CONCEPTUAL AND REPRESENTATIVE ONLY. CONTRACTOR SHALL DESIGN COMPLETE EARTHING SYSTEM IN ACCORDANCE WITH SS 551.
3. EARTH CABLES SHALL BE IN RING CONNECTION C/W 50 MM DIA HD UPVC PIPE. SEE STANDARD DETAILS 16441.
4. CONTINUITY OF EARTHING CONNECTION CABLE SHOWN TYPICALLY BY NUMBER OF LINES EACH REPRESENTING EACH CABLE.
5. THE EARTHING POINTS SHOWN ARE ONLY REPRESENTATIVE. CONTRACTOR SHALL DESIGN NUMBER OF EARTH PITS IN ACCORDANCE WITH SS 551 AND PROVIDE ACCORDINGLY. ALL COSTS ASSOCIATED WITH FINALIZATION OF THE ROUTING, EARTH PITS, AND ASSOCIATED ACCESSORIES SHALL BE INCLUDED IN THE CONTRACT VALUE.
6. EACH EARTH POINT CONSISTS OF MINIMUM 3600 MM LENGTH X 16 MM DIA TINNED COPPER C/W INSPECTION PIT, COVER, AND INTERCONNECTION OF EARTH CABLE IN RING.
7. PROVIDE SURGE DIVERTER AS EARTH POTENTIAL EQUALIZATION (BY OTHERS).
8. CONTRACTOR SHALL ENSURE ELECTRICAL CONTINUITY ALONG THE REINFORCEMENT BAR OF THE STRUCTURE.

9. CONNECT EARTH BAR TO COLUMN MOUNTED EARTH PLATE WITHIN SWITCH ROOM. REFER TO STANDARD DETAIL 16459B.
10. REFER TO TYPICAL STANDARD DETAIL FOR EARTHING DETAILS IN TRANSFORMER ENCLOSURE.
11. TRANSIENT EARTH CLAMP CONNECTION BETWEEN ELECTRICAL AND INSTRUMENT EARTHING SYSTEM SHALL BE PROVIDED.
12. OUTGOINGS FROM EARTH BAR SHOWN TO MAJOR EQUIPMENT IS ONLY INDICATIVE. CONTRACTOR SHALL PROVIDE EARTHING TO ALL ELECTRICAL EQUIPMENT, SERVICES, AND OTHER EQUIPMENT FOR EQUIPOTENTIAL EARTHING, ETC. IN ACCORDANCE WITH SS 638 AND SS 551. ALL COSTS ASSOCIATED WITH EARTHING SHALL BE INCLUDED IN THE CONTRACT VALUE.
13. CONTRACTOR SHALL COORDINATE WITH OTHER CONTRACTORS FOR INSTALLATION SCHEDULE IN AREAS TO MATCH WITH OVERALL CONSTRUCTION PROGRAMME. EACH EARTH POINT CONSISTS OF MINIMUM 3600 MM LENGTH X 16 MM DIA TINNED COPPER C/W INSPECTION PIT, COVER, AND INTERCONNECTION OF EARTH CABLE IN RING.
14. PROTECTIVE (POWER) EARTHS FROM EQUIPMENT IN XLV ROOMS SHALL BE CONNECTED TO 415V EARTH BARS IN NEAREST LV SWITCH ROOM.
15. CONTRACTOR SHALL PROVIDE ALL THE PIPE SLEEVERS REQUIRE BETWEEN FLOORS AND SWITCHROOMS FOR THE EARTH CABLES BETWEEN THE EARTH BAR. EARTH CABLES (BY OTHERS).

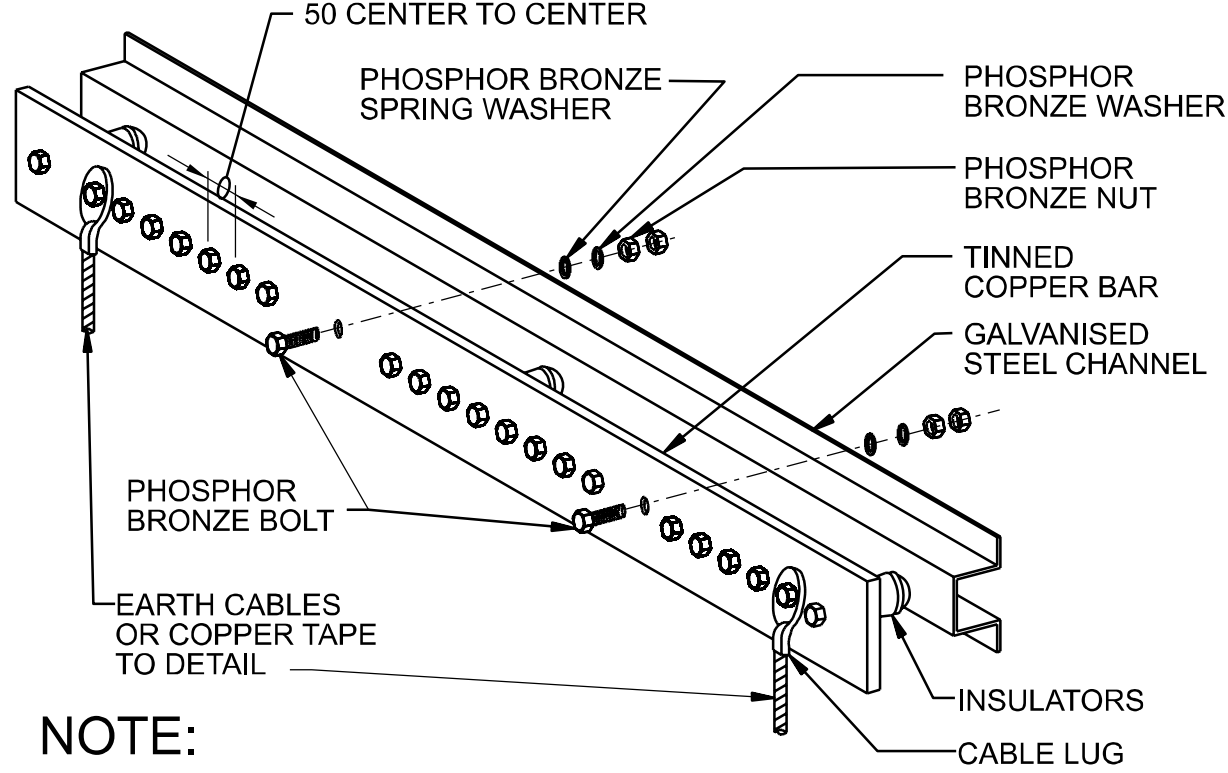

- NOTE:
1. ALL DIMENSIONS IN MILLIMETERS, UNLESS OTHERWISE NOTED.
 2. THE NUMBER OF TERMINATIONS REQUIRED SHALL REFER TO THE EARTHING SCHEMATIC DIAGRAM.
 3. MOUNTING HEIGHT AT 600 ABOVE FINISHED FLOOR.
 4. 20% SPARE TERMINALS SHALL BE PROVIDED

EARTH BAR FOR EARTHING SYSTEM
SCALE: NTS

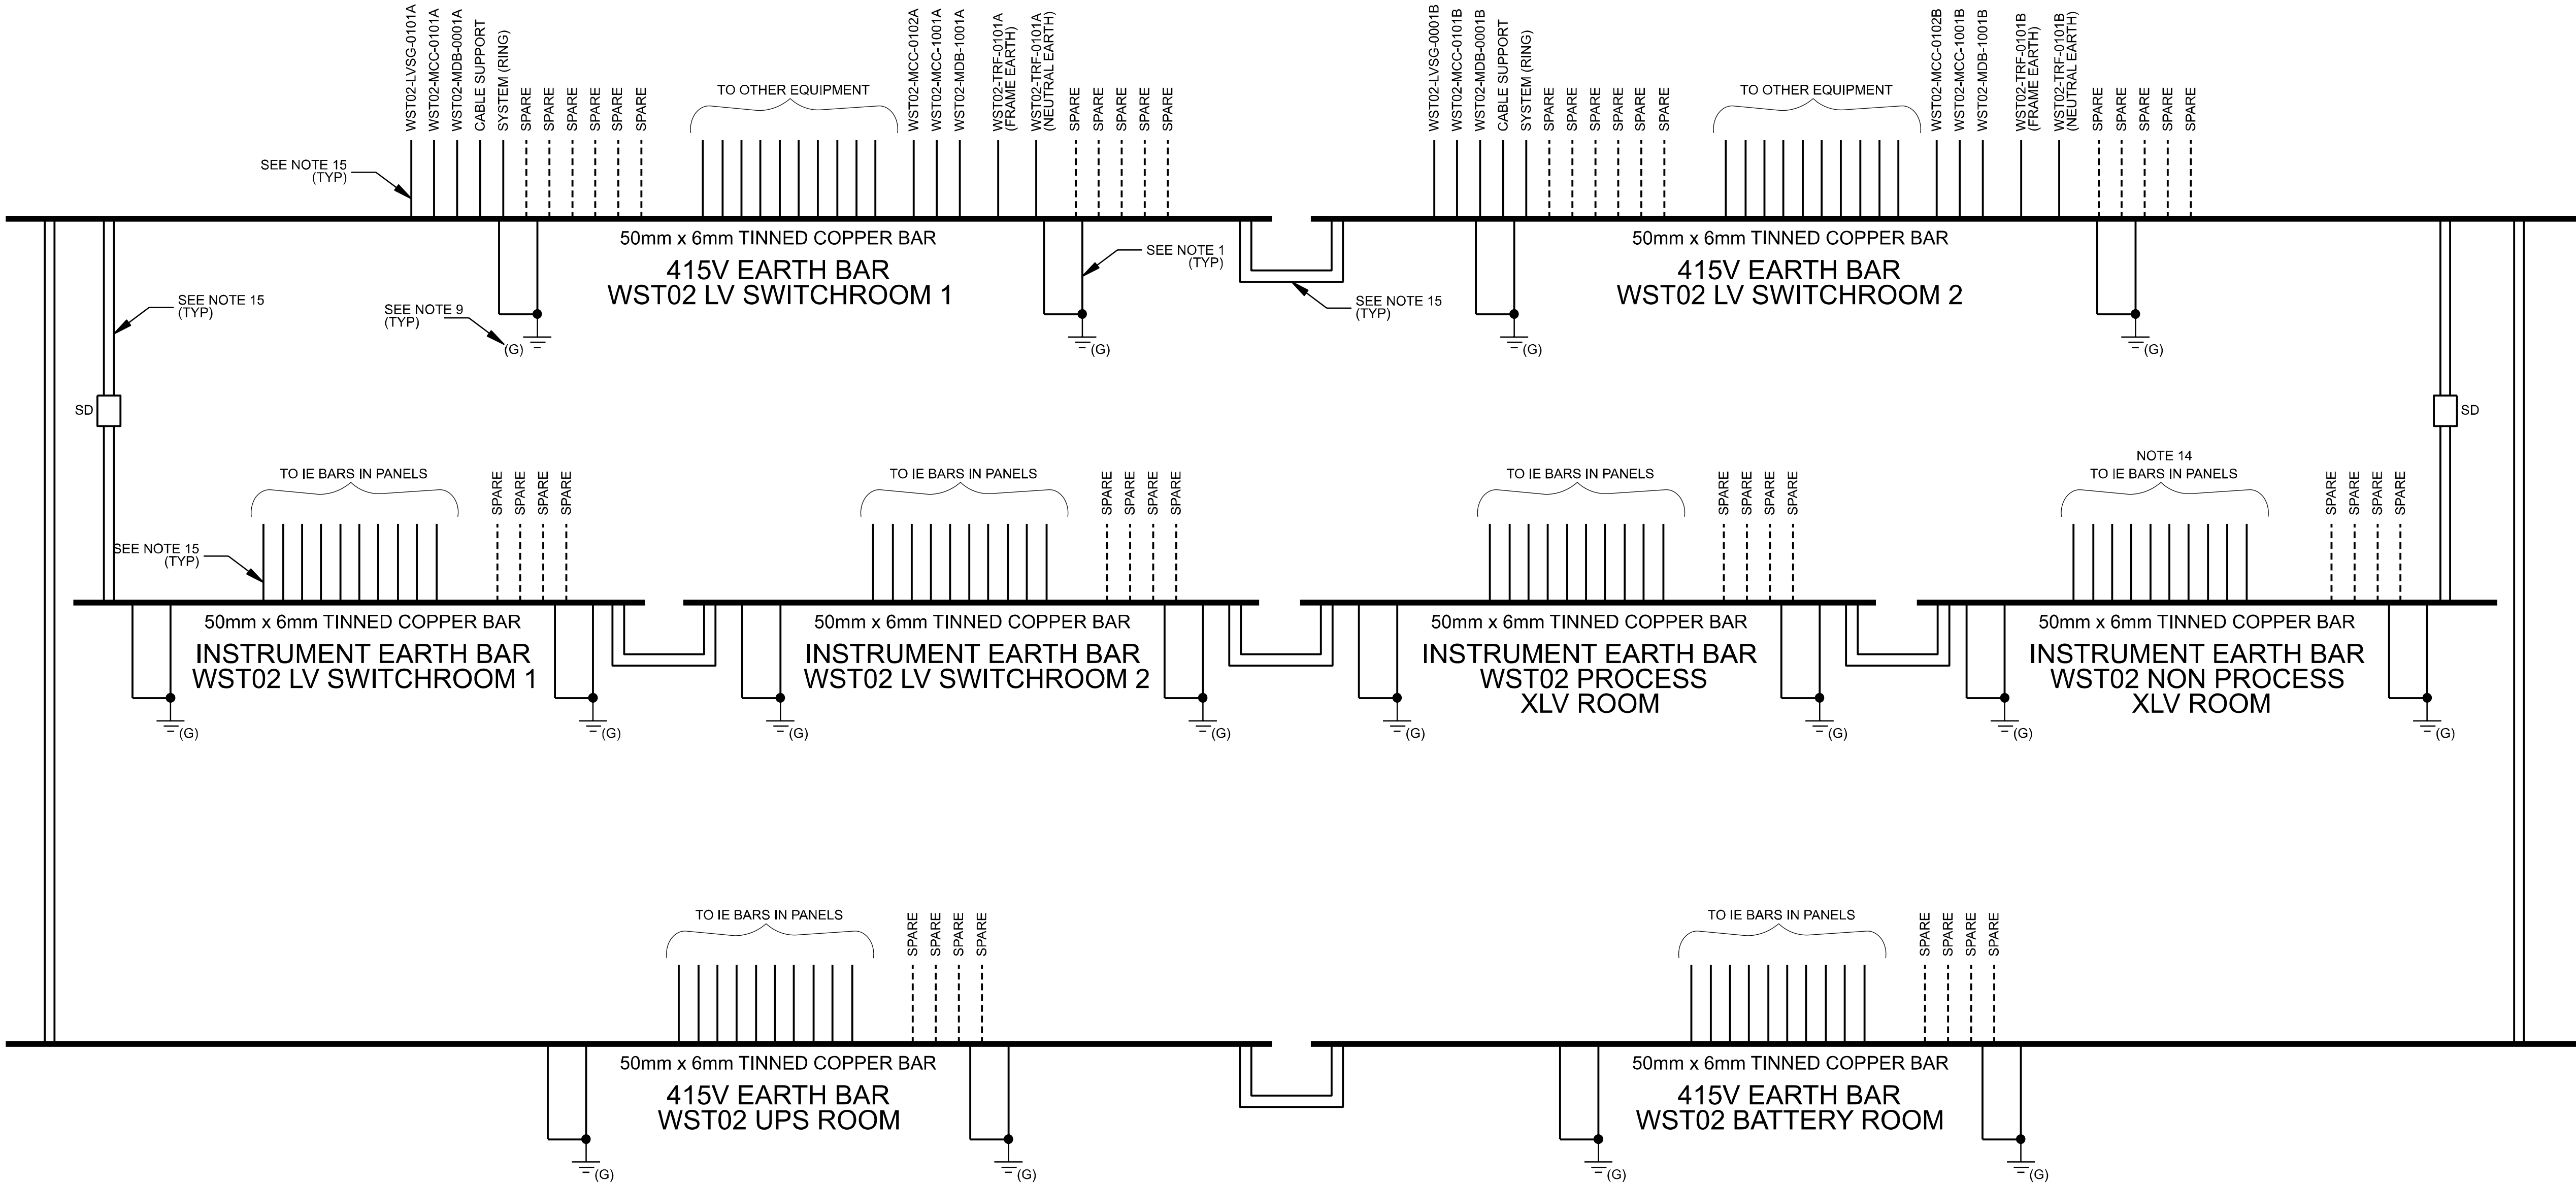

TENDER

T1	20/05/22	ISSUED FOR TENDER	LBL
REV	DATE	DESCRIPTION	REVIEWED
			LF

CLIENT:



PROGRAMME MANAGER:



CONSULTANT:



PROJECT TITLE:

TUAS WATER RECLAMATION PLANT (TWRP)
DTSS PHASE 2

DRAWING TITLE:

SIDESTREAM N REMOVAL
EARTHING SCHEMATICS

DRAFTED: UM	DESIGNED: GR	SHEET SIZE: A1
DRAFTING CHECK: DW	DESIGN CHECK: SK/PC	SCALE: NA
DATE: 20/05/22	REVIEWED: LBL	PBS: 131101

CONTRACT: C4B	DRAWING NUMBER: PUB-DTSS2-TWRP
SHEET NUMBER: WST02-E-7300	REVISION: T1

THIS DRAWING IS COPYRIGHT