


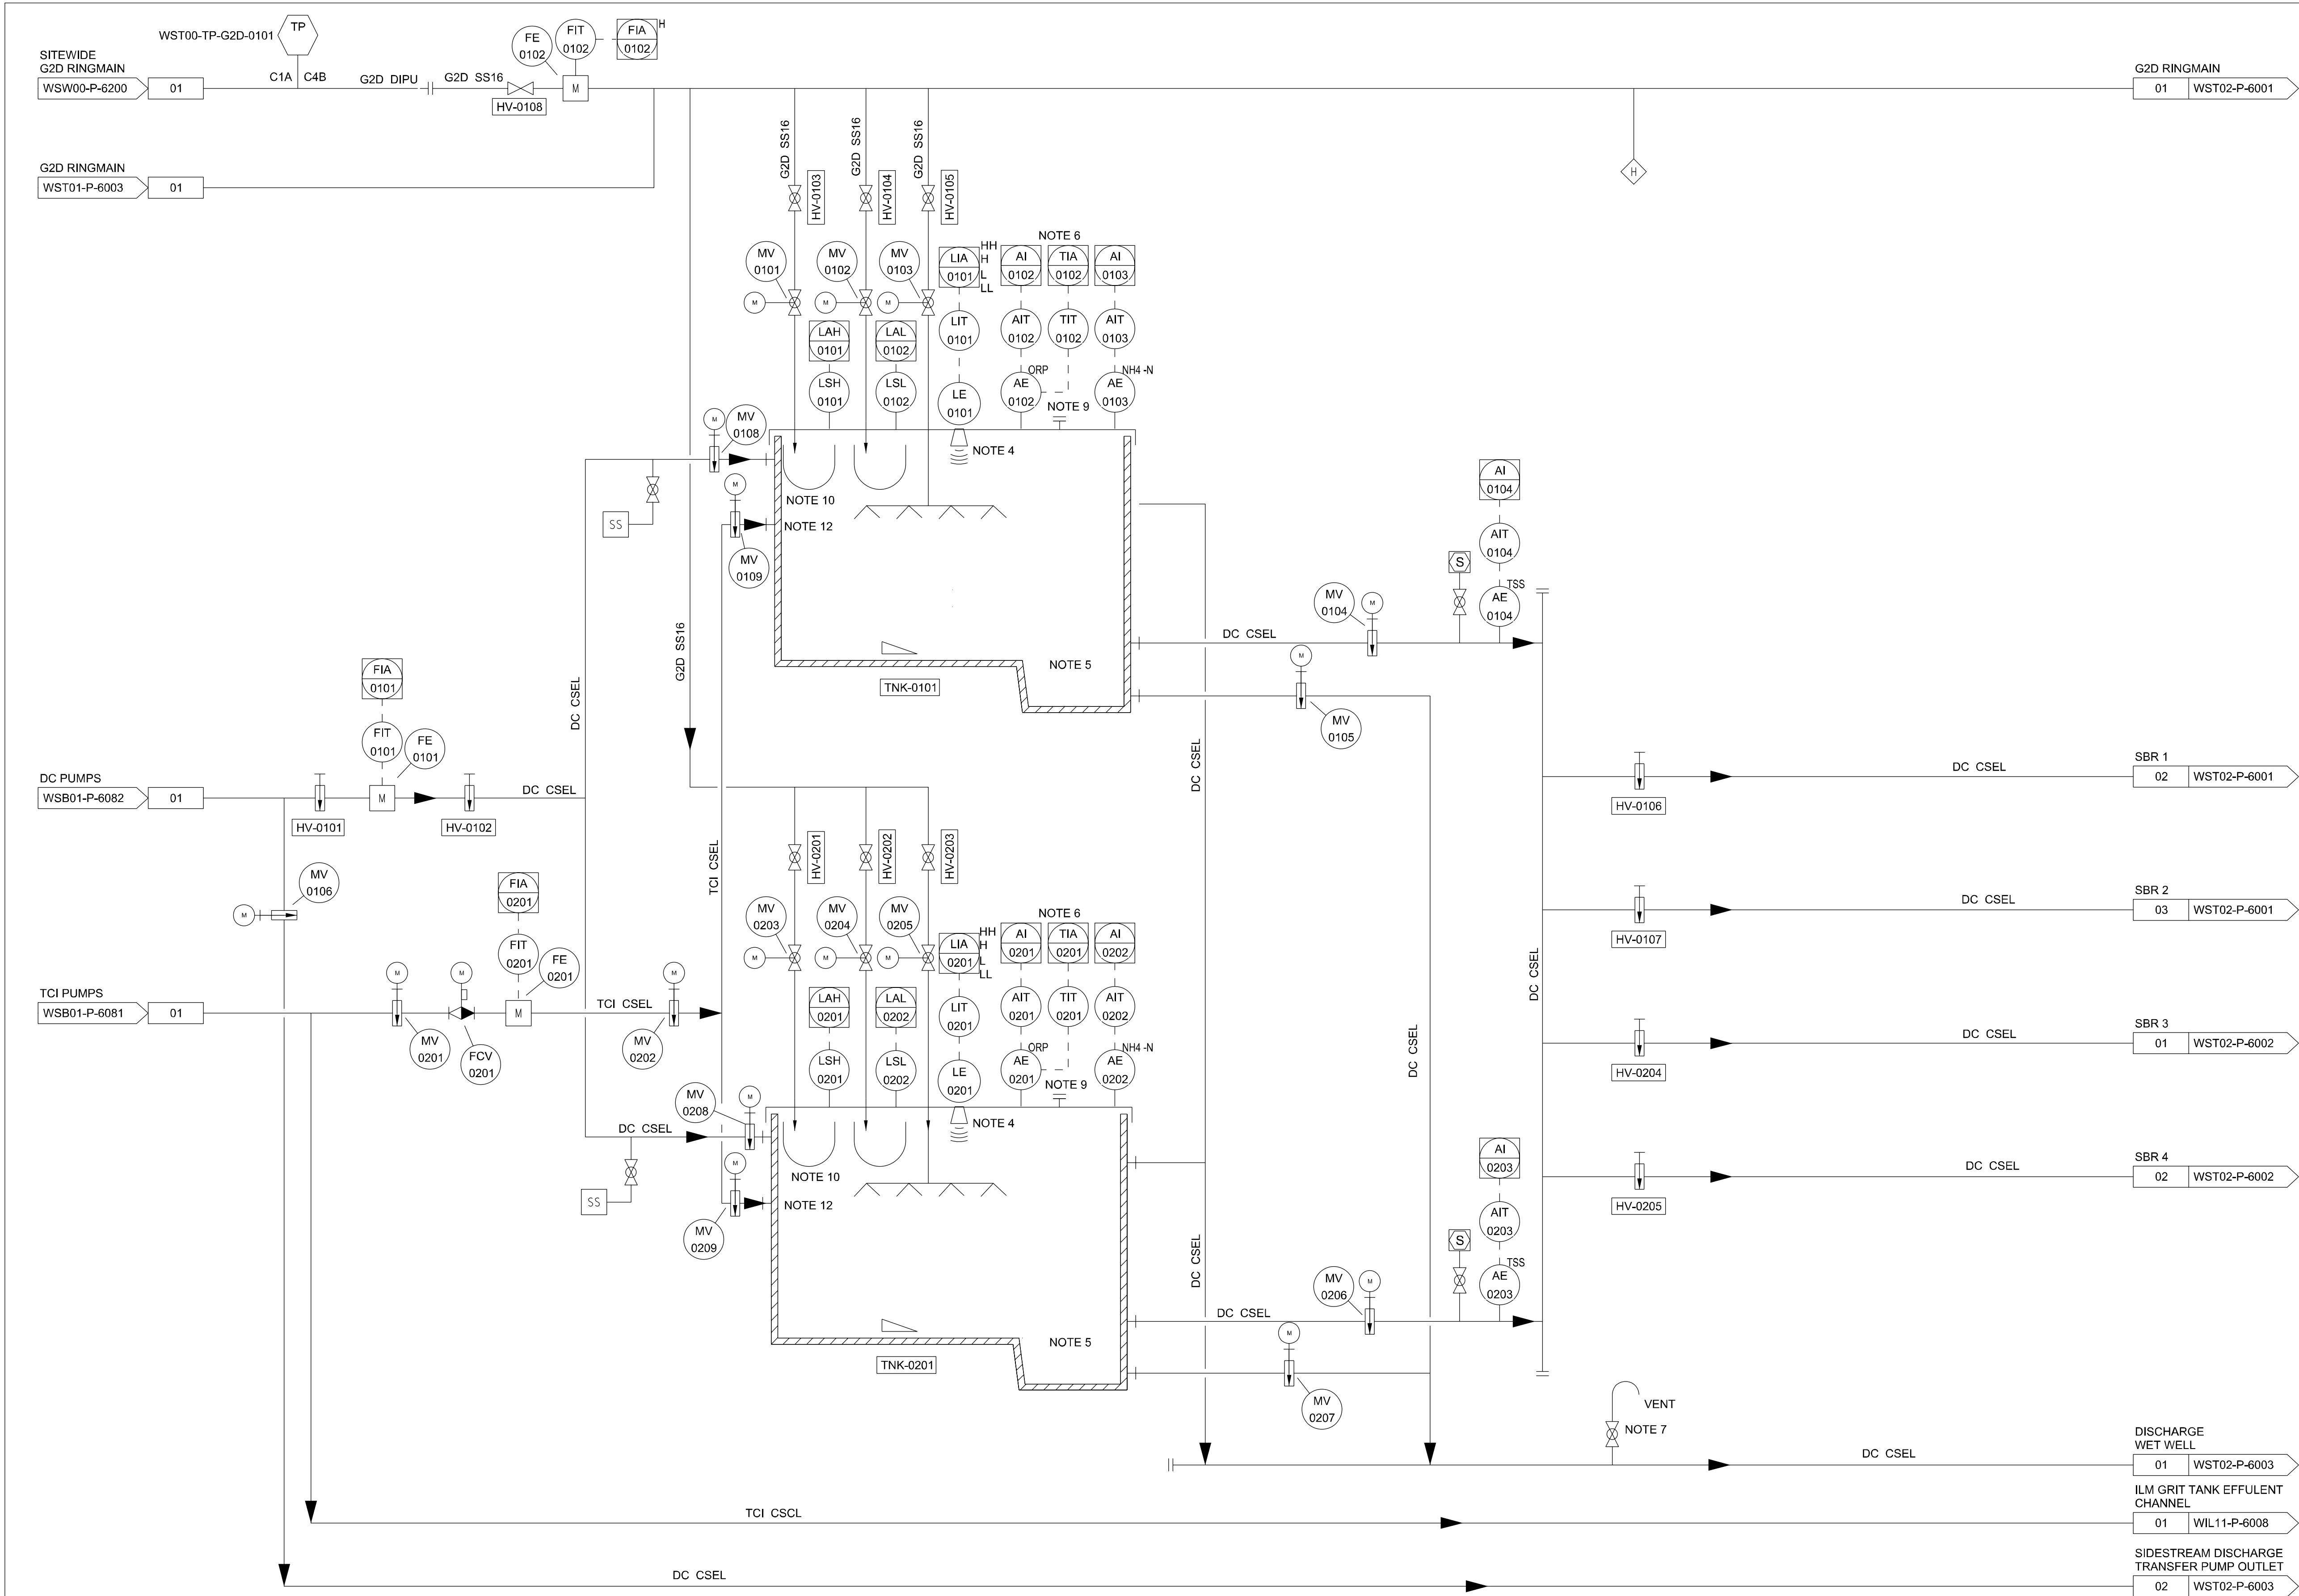

NOTES:-

1. TAGS ARE PREFIXED WITH THE FACILITY CODE OF THE DRAWING AND THE DRAWING PROCESS UNIT CODE UNLESS OTHERWISE INDICATED.
2. THE CONTRACTOR SHALL PROVIDE THE PIPE/DUCT SUPPORT SYSTEM (SUPPORT BRACKETS, THRUST RESTRAINTS, THERMAL EXPANSION ETC.) TO S.O. APPROVAL.
3. WHERE INTEGRAL ACTUATOR CONTROLS ARE NOT EASILY ACCESSIBLE, REMOTE LCS SHALL BE PROVIDED.
4. TO PROVIDE GUIDED RADAR TYPE LIT.
5. SPECIALIST VENDOR/CONTRACTOR RESPONSIBLE DESIGN THE OUTLET FROM EQ. TO MINIMISE SOLIDS CARRY OVER TO REACTORS. THESE MAY INCLUDE NOZZLE POSITIONING AND TANK OUTLET DEVICES.
6. CONTRACTOR IS RESPONSIBLE TO POSITION INSTRUMENTS PROPERLY FOR ACCURACY.
7. AIR VENT TO BE PROVIDED AT THE HIGHEST POINT.
8. RODDING, FLUSHING & DRAIN PROVISIONS FOR ALL PIPELINES BASED ON PIPE ROUTING SHALL BE PROVIDED.
9. DESIGN OF TANK SHALL ALLOW PROVISION FOR INSTALLATION OF FUTURE ODOUR COVERS AND CONNECTION TO FUTURE OCF
10. TIPPING BUCKET FOR FLUSHING THE TANK.
11. ALL DRAINS SHALL BE ROUTED TO THE NEAREST TWRP SEWER MANHOLE.
12. SPECIALIST VENDOR/CONTRACTOR RESPONSIBLE DESIGN THE INLET OF EQ TANK SUCH AS CONSIDERING INLET BAFFLE PLATES TO IMPROVE INLET MIXING WHILE MINIMISING SHORT CIRCUITING AND TURBULENCE IN THE SOLIDS SEPARATION AREA.

PROCESS UNIT
201

EQUILIZATION TANK
2 DUTY

TENDER

T1	20/05/22	ISSUED FOR TENDER C4B	CN	GOT
REV	DATE	DESCRIPTION	REVIEWED	AUTHORISED

CLIENT:



PROGRAMME MANAGER:



CONSULTANT:



PROJECT TITLE:

TUAS WATER RECLAMATION PLANT (TWRP)
DTSS PHASE 2

DRAWING TITLE

P&ID
EQUALIZATION TANKS

DRAFTED: PS	DESIGNED: KV	SHEET SIZE: A1
DRAFTING CHECK: ASR	DESIGN CHECK: CN	SCALE: NTS
DATE: 04/07/19	REVIEWED: CN	PBS: 131101

CONTRACT:	DRAWING NUMBER: PUB-DTSS2-TWRP	REVISION:
-	SHEET NUMBER: WST02-P-6000	T1

THIS DRAWING IS COPYRIGHT