


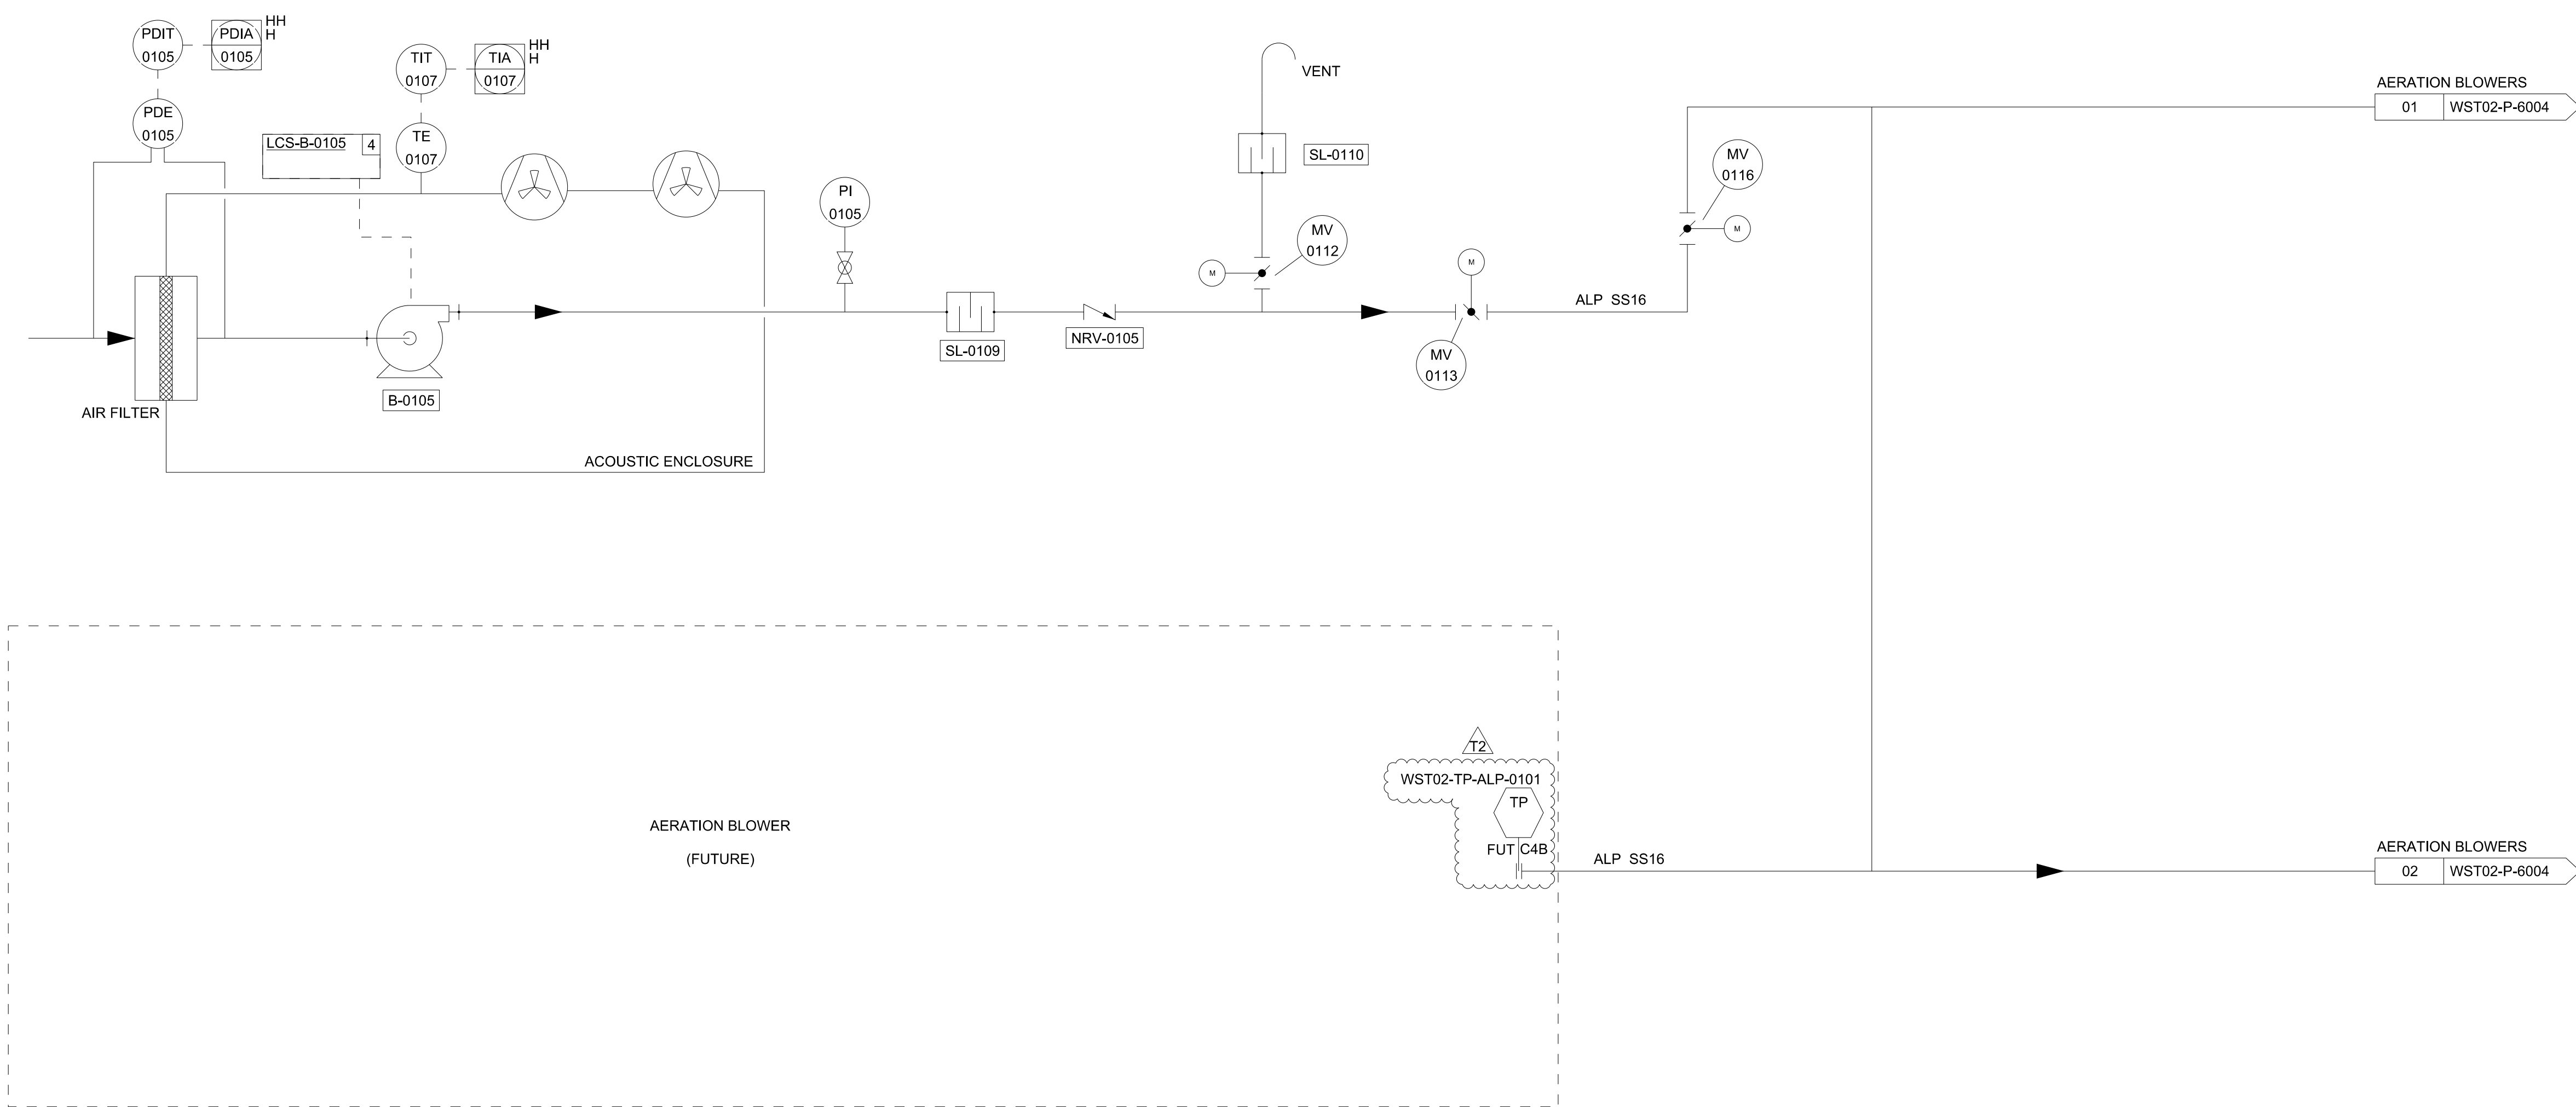

PROCESS UNIT
203

SSN AERATION BLOWERS
4 DUTY, 1 STANDBY, 1 FUTURE

- NOTES:-
1. TAGS ARE PREFIXED WITH THE FACILITY CODE OF THE DRAWING AND THE DRAWING PROCESS UNIT CODE UNLESS OTHERWISE INDICATED.
 2. THE CONTRACTOR SHALL PROVIDE THE PIPE/DUCT SUPPORT SYSTEM (SUPPORT BRACKETS, THRUST RESTRAINTS, THERMAL EXPANSION ETC.) TO S.O. APPROVAL.
 3. WHERE INTEGRAL ACTUATOR CONTROLS ARE NOT EASILY ACCESSIBLE, REMOTE LCS SHALL BE PROVIDED.
 4. ALP ISOLATION/BALANCING VALVES TO BE PROVIDED AT 5M INTERNAL (NOM.)
 5. ALL AIR PIPES WITHIN NORMAL REACH FROM ACCESS WAYS TO BE GUARDED WITH REMOVABLE WIRE MESH TO PREVENT ACCIDENTAL CONTACT WITH HOT PIPES.
 6. EACH BLOWER SHALL COME WITH A LOCAL (LCP) WHICH WILL BE CONNECTED TO THE PROCESS AUTOMATION NETWORK (PAN). LCP'S SEQUENCE CONTROL SHALL BE BY BLOWER MASTER CONTROL PANEL (MCP). REFER TO CONTROL SYSTEM ARCHITECTURE FOR NETWORK CONNECTION AND CONFIGURATION.
 7. ARRANGEMENT FOR PLANT AND EQUIPMENT SUBJECTED TO CONTRACTOR FINAL SELECTION.
 8. ALL DRAINS SHALL BE ROUTED TO THE NEAREST TWRP SEWER MANHOLE.
 9. ALL PIPELINE & VALVES WITH DESIGN TEMPERATURE >60°C SHALL BE INSULATED FOR PERSONNEL PROTECTION.

TENDER

T2	25/11/22	ISSUED FOR TENDER C4B (2ND STAGE)	CN	GOT
T1	20/05/22	ISSUED FOR TENDER C4B	CN	GOT
REV	DATE	DESCRIPTION	REVIEWED	AUTHORISED

CLIENT:



SINGAPORE'S
NATIONAL
WATER AGENCY

PROGRAMME MANAGER:



A JOINT VENTURE DELIVERING THE DTSS2 PROJECT

CONSULTANT:



CH2M HILL Singapore Pte Ltd

PROJECT TITLE:

TUAS WATER RECLAMATION PLANT (TWRP)
DTSS PHASE 2

DRAWING TITLE

P&ID
SSN AERATION BLOWERS
(5 & 6)

DRAFTED: PS	DESIGNED: KV	SHEET SIZE: A1
DRAFTING CHECK: ASR	DESIGN CHECK: CN	SCALE: NTS
DATE: 04/07/19	REVIEWED: CN	PBS: 131101

CONTRACT:

DRAWING NUMBER:
PUB-DTSS2-TWRP

SHEET NUMBER:
WST02-P-6005

REVISION:
T2

THIS DRAWING IS COPYRIGHT