


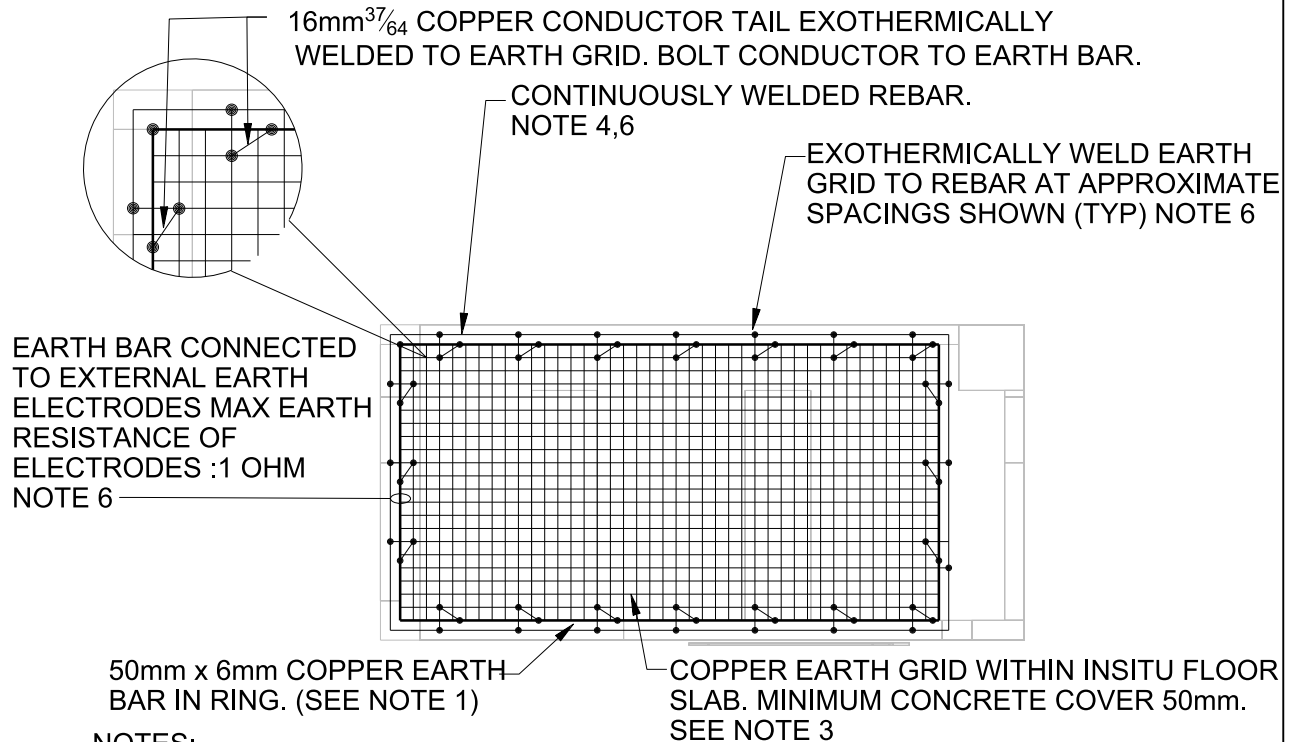

NOTES:

1. REFER (16447) FOR TYPICAL CONFIGURATION OF EARTH BAR. WHERE RAISED COMPUTER FLOOR SPECIFIED, LOCATED EARTH BAR 150mm ABOVE SLAB. IN OTHER AREAS, LOCATE EARTH BAR WITHIN CABLE CHAMBER 150mm BELOW SLAB.
2. DOUBLE WIRE TIE WELDED REBAR TO ADJACENT REINFORCING STEEL AT MINIMUM 500mm SPACING. NOTE 6
3. EARTH GRID PREFABRICATED SOLID COPPER WIRE MESH, 200mm x 200mm WIRE SPACING CROSS CONNECTIONS SILVER BRAZED USING A 35% SILVER ALLOY BRACING MATERIAL AND NON-CORROSIVE FLUX. CO-ORDINATE EXACT LOCATION OF EARTH GRID WITH SLAB PENETATIONS IN EQUIPMENT ROOM FLOOR. PROVIDE MINIMUM 50mm CONCRETE COVER. CAN BE FIXED DIRECTLY TO SLAB SURFACE (NON-CAST IN) IN LOCATIONS WHERE RAISED COMPUTER ROOM IS PROVIDE.
4. CONTINUOUSLY WELDED REBAR T25 MINIMUM. PROVIDED MINIMUM 200mm WELD OVERLAP AND MINIMUM 10mm WELD THROAT THICKNESS. WIRE TIE TO ADJACENT REBAR AT MAXIMUM 300mm SPACING. NOTE 6
5. PROVIDE CAST-IN EARTH PLATE WITHIN EACH CORNER OF XLV ROOM. EXOTHERMICALLY WELD TO EARTH GRID. LOCATED EARTH PLATE ON TOP OF STRUCTURAL WHERE RAISED COMPUTER FLOOR SPECIFIED. IN OTHER LOCATION LOCATE PLATE TO UNDERSIDE OF STRUCTURE. NOTE 6.
6. NOT REQUIRED FOR XLV SERVER ROOM B-XLV-IT WITHIN ELECTRICAL BUILDING.

EXTRA LOW VOLTAGE EQUIPMENT ROOM LOW NOISE EARTHING SYSTEM

NTS

STANDARD DETAIL

16461

JACOBS